



**PRESSURIZED SELF-CONTAINED  
PORTABLE EYEWASH W/DRENCH HOSE**  
PART NUMBER: 01104002T

**SPECIFICATION:**

Third party certified to ANSI Z358.1, the self-contained eyewash shall deliver a non-injurious dual stream of water at a minimum volume of 0.4 gpm (1.5 lpm) for a full 15 minutes or longer. Eyewash is supplied with a single motion, stay open push plate activated 1/2" ball valve. Unit shall supply a minimum of six gallons of useable water from a 13.5 gallon stainless steel vessel equipped with carrying handles to easily accommodate eyewash relocation. A relief valve is included to assist in preventing over-pressurization and a custom-faced gauge is provided to monitor internal tank pressure. The eyewash includes a self-adjusting 0.4 gpm (1.5 lpm) regulator to assure constant, even flow through UV resistant ABS plastic eyewash heads. The fixed dual stream eyewash heads function with ABS float off covers secured with stainless steel bead chains provided to inhibit dust and/or contamination when not in use. A 3/8" chrome plated brass self-closing squeeze valve operated eight-foot drench hose is included for optional spot drenching. The drench hose assembly includes a self-adjusting 0.4 gpm (1.5 lpm) regulator to assure constant, even flow through a long lasting solvent resistant delrin single spray head. Highly visible graphics are included on the eyewash push plate to indicate activation method. Maintenance and operation information is visibly displayed on the vessel side. Eyewash shall be Encon Safety Products Model 01104002T. For dolly cart with closure straps, order Encon Safety Products Model 01105003 (in addition to Model 01104002T).

**MATERIALS OF CONSTRUCTION:**

**PIPING:** 1/2" Chrome plated brass.

**VALVES:** 1/2" Chrome plated bronze stay open ball valve with chrome plated ball, stainless steel valve stem and stainless steel push plate with actuation graphic (eyewash) and 3/8" chrome plated bronze self-closing squeeze valve, stainless steel valve stem and lock open handle actuator (drench hose).

**EYEWASH HEAD:** ABS plastic dual stream heads and wye with ABS plastic pop off covers secured with stainless steel bead chains.

**DRENCH HOSE:** Solvent resistant delrin single spray head.


**HOSE:** Nylon Recoil Hose 1/4" X 8" and length of 120" (304.8cm)

**REGULATOR:** Self-adjusting 0.4 gpm (1.5 lpm) eyewash and drench hose regulators.


**VESSEL:** Type 304 Stainless Steel.

**WATER TREATMENT ADDITIVE:** 1 Bottle of Hydrosep<sup>®</sup> shipped with each unit. Treats 5 to 20 gallons (18.9 l to 75.7 l) of potable water up to 120 days.

**WEIGHT:** 32 lbs (14.5 kgs)

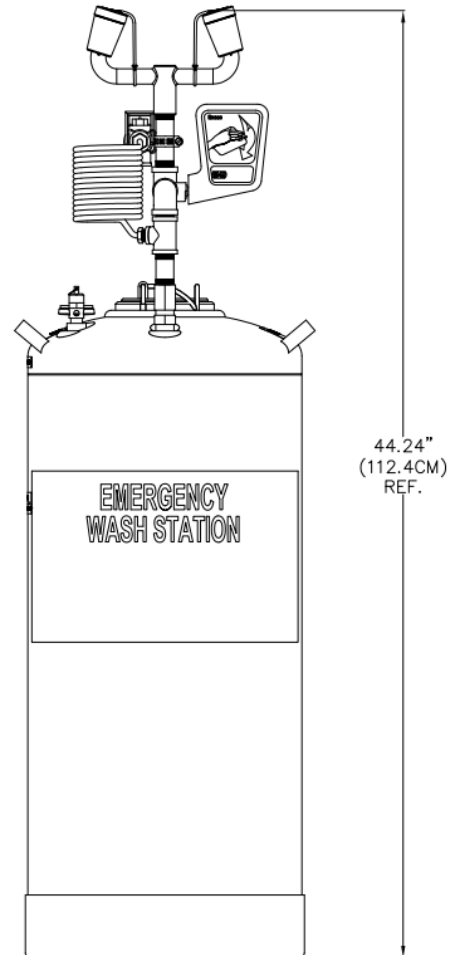

FRONT VIEW

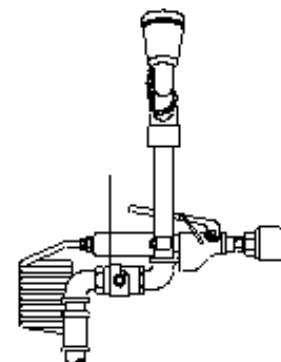

SIDE VIEW OF PIPING